


PRODUCTIVE ACCURACY

710 SERIES

SUEDING, BRUSHING and SANDING
OF ALL TEXTILES AND NON-METALLIC FLEXIBLE MATERIALS

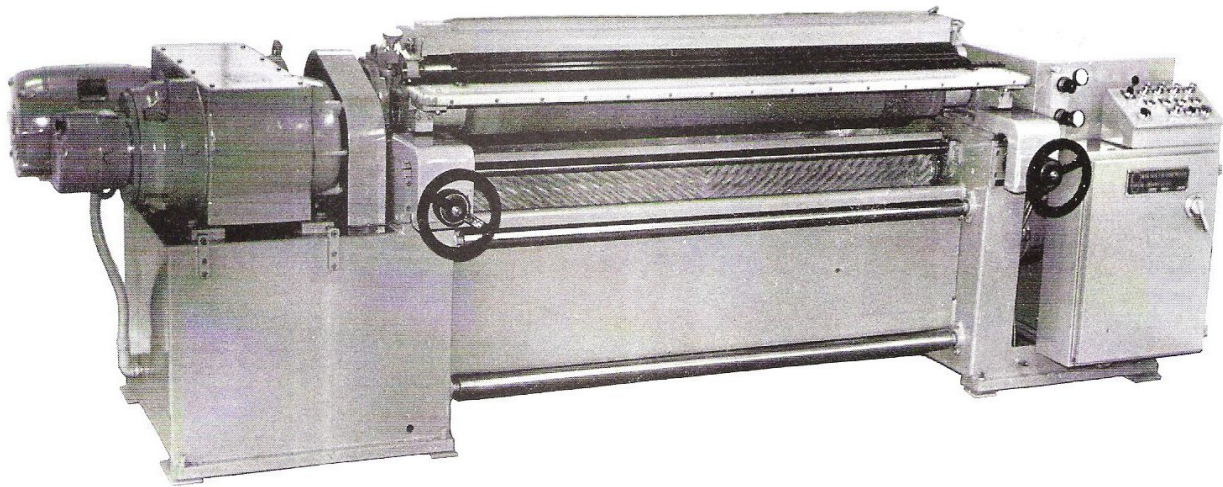


- * KNITS, WOVENS and NON-WOVENS
of Synthetic and Natural Fibers
- * VINYLs and URETHANE COATED MATERIALS
- * RUBBER * CORK * SHOE SOLING
- * FLEXIBLE PLASTIC, GASKET and INSULATING MATERIAL

AVAILABLE IN STANDARD WIDTHS UP TO 84 INCHES

CURTIN-HEBERT MACHINES


11 Forest Street P.O. Box 511
Gloversville, New York 12078-0511
PH 518-725-7157 FAX 518-773-3805

EMAIL: www.info@curtinhebert.com

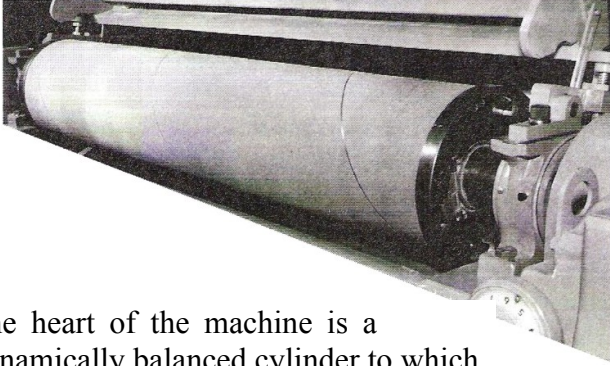


The heart of the machine is a dynamically balanced cylinder to which industrial coated abrasive is applied. The cylinder is drilled for water circulation to help diffuse friction heat, preventing distortion of the .0005" concentricity.

The position of the pressure roll in respect to the cylinder is controlled by micrometer had-wheels graduated in .001". The adjustment is so accurate that print can be sanded from ordinary newspaper without harming the paper itself.

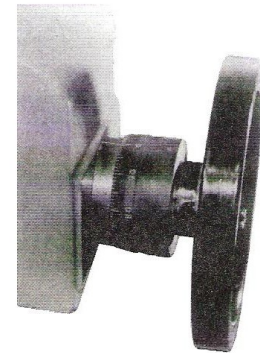

Below is an illustration of material flow as it passes over the rubber pressure roll to come into contact with the machine's cylinder. From the cylinder, it continues on to a material cleaning brush and then exits from the machine.

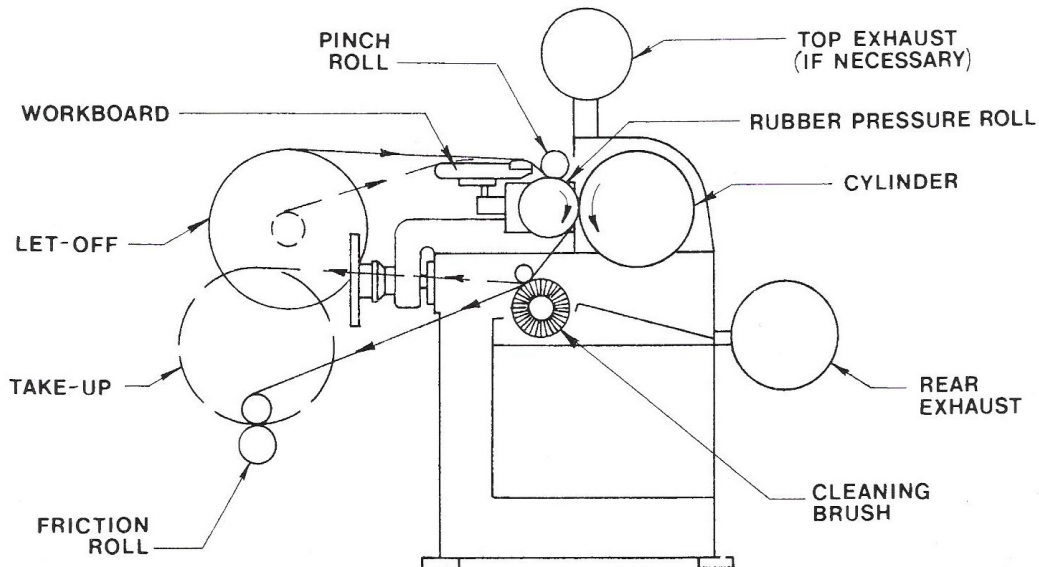

Demonstration equipment available at our Gloversville Plant.
Send or bring us your samples or finishing problems.